



Are aramid nanoribbons suitable for high-temperature capacitive energy storage applications? However, polymers naturally exhibit low thermal conductivity. Herein, we demonstrate the realization of high anisotropic thermal conductivity in dielectrics based on 2D aramid nanoribbons (ANRs), showing great potential for high-temperature capacitive energy storage applications.



Are aramid nanofibers based membranes suitable for osmotic energy harvesting? Here, aramid nanofibers (ANFs) based membranes with high chemical/thermal stability, mechanical strength, toughness, and surface charge density make them capable of high-performance osmotic energy harvesting from pH gradients generated upon wastewater dilution.



Are aramid nanofibers a good guest material for graphene paper supercapacitor electrodes? This problem may be exacerbated with the inclusion of functional guest materials, often yielding strengths of <15 MPa. Here, we show that graphene paper supercapacitor electrodes containing aramid nanofibers as guest materials exhibit extraordinarily high tensile strength (100.6 MPa) and excellent electrochemical stability.



Can aramid nanofiber membranes be used for energy harvesting from proton gradients? Aramid nanofiber membranes for energy harvesting from proton gradients. Adv. Funct. Mater. 2022; 32 2102080 The electrostatic attraction and catalytic effect enabled by ionic-covalent organic nanosheets on Mxene for separator modification of lithium-sulfur batteries. Design principles for solid-state lithium superionic conductors.



Do graphene paper supercapacitor electrodes containing aramid nanofibers have a high tensile strength? Here,we show that graphene paper supercapacitor electrodes containing aramid nanofibers as guest materials exhibit extraordinarily high tensile strength(100.6 MPa) and excellent electrochemical stability. This is achieved by extensive hydrogen bonding and ??????? interactions between the graphene sheets and aramid nanofibers.







Are aramid nanofibers a good choice for wastewater treatment technologies? For wastewater treatment technologies, the cost of the high-performance composites can be another valid concern. [ 14, 20] Aramid nanofibers (ANFs), a new ???nanoscale building block???, have outstanding mechanical properties and abundant surface charge groups, which make them ideal for nanocomposite membranes.





Strong electrodes with good energy storage capabilities are necessary to accommodate the current needs for structural and flexible electronics. To this end, conjugated polymers such as polyaniline (PANI) have attracted much attention due to their exceptional energy storage performance. However, PANI is typic





Incorporating flame retardants into polymers has always been the most popular strategy for improving the flame retardancy of materials [7, 8] ene, as an emerging two-dimensional (2D) nanomaterial, has been widely applied in energy storage [9], electromagnetic interference shielding [10], sensing [11], photodetection [12], photocatalysis [13], and other fields owing to ???





Zinc ion microcapacitors (ZIMCs) are ideal energy storage device candidates for wearable electronic devices based on the matching between battery-type electrodes and capacitor-type electrodes, making full use of the respective advantages of batteries and capacitors. Aramid nanofiber (ANF) is made up of aramid fiber (PPTA), a 1D nanofiber





This study introduces a cut-to-fit methodology for customizing bulk aramid aerogels into form factors suitable for wearable energy storage. Owing to strong intercomponent bonds within aramid-based building blocks, it is possible to delaminate layered bulk aerogel into flexible and thinner sheets, enabling efficient mass production.








Although numerous researches have been conducted to ameliorate the energy storage capacity of dielectric polymer composites, it is a perplexing puzzle to accelerate E b and obtain high energy storage capacity and superior reliability under high E (ca. 300???400 MV?m ???1) along with elevated temperatures (150???250 ?C).



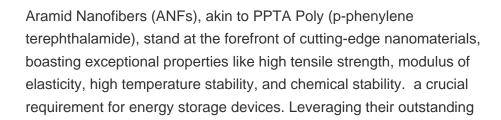



Lithium ion batteries and non-aqueous redox flow batteries represent two of the most important energy storage technologies to efficient electric vehicles and power grid, which are essential to decreasing U.S. dependence on fossil fuels and sustainable economic growth. Many of the developmental roadblocks for these batteries are related to the separator, an electrically ???



The modified carbon nanotube fiber has 33 times more energy storage capacity, 3.3 times more mechanical strength, and more than 1.3 times more electrical conductivity than ordinary carbon nanotube fibers.

Moreover, since the energy storage electrode material was developed using only pure carbon nanotube fibers, it can be mass-produced using wet





High-performance capacitive energy storage under high voltages over a broad temperature range is eminently indispensable for the next generation of microelectronics and electrical power modules.





Download Citation | On Aug 1, 2023, Sufeng Zhang and others published Excellent Energy Storage Performance with Outstanding Thermal Stability Assisted by Interfacial Resistance of Aramid-Based



DOI: 10.1016/j.apsusc.2023.158363 Corpus ID: 261447268; Excellent Energy Storage Performance with Outstanding Thermal Stability Assisted by Interfacial Resistance of Aramid-Based Flexible Paper Capacitors



PDF | On Jan 1, 2022, Minh Canh Vu and others published Scalable Graphene Fluoride Sandwiched Aramid Nanofiber Paper with Superior High-Temperature Capacitive Energy Storage | Find, read and cite



Biopolymer-based hydrogel electrolytes for advanced energy storage/conversion devices: Properties, applications, and perspectives. Ting Xu, Kun Liu, Nan Sheng, Minghao Zhang, Kai Zhang. Pages 244-262 View PDF. Article preview. select article Eutectic electrolyte and interface engineering for redox flow batteries.




Download Citation | On Jan 1, 2023, Sufeng Zhang and others published Excellent Energy Storage Performance with Outstanding Thermal Stability Assisted by Interfacial Resistance of Aramid-Based



The energy storage performances of different regions in the film were tested and summarized in Fig. 4E. As seen, their D - E loops possess quite similar shape and size at 600 MV m ???1 and 200 ?C.





In order to fulfill the rapid demand in electronic devices markets, such as electric cars, phones, electric tools [1], and green energy storage systems, developing energy supply device with high energy density, high power density, long cycle life, and preeminent safety performance is very significant and urgent [2], [3]. As one kinds of fast charging-discharging ???



eectively integrate aramid bers and energy-storage mate-rials [26, 27]. Thus, the combination of ACF and PPS can be a possible way to solve the interfacial problems [22, 28]. In our previous work, the polyphenylene sulde ultrane fiber prepared in the laboratory have been applied in oil???water separation [3129], solar???thermal conversion ???



The dielectric energy storage performance of HBPDA-BAPB manifests better temperature stability than CBDA-BAPB and HPMDA-BAPB from RT to 200 ?C, mainly due to the exceptionally high and stable charge???discharge efficiency of >98.5 %. Improving interfacial and compressive properties of aramid by synchronously grafting and crosslinking



The smart multi-responsive aramid aerogel fiber with high electrical conductivity (2 x10 4 S/m) exhibits excellent response to various external stimuli. Meanwhile, PCMs with high latent heat that confined in the porous conductive aerogel fiber plays a critical role for energy storage and release during the response to external stimuli.





This work demonstrates an efficient strategy for designing structural electrodes based on conjugated polymers with capacity values up to 128? 5 mA h g-1 and Young's modulus of 4? 0.5 GPa, and tensile strength of 40? 4 MPa. Strong electrodes with good energy storage capabilities are necessary to accommodate the current needs for structural and flexible electronics. To this ???







select article Phase-inversion Induced Co-assembly of Poly(ether imide)/Aramid Nanofibrillar Composite Separators for High-speed Lithium-metal Batteries. to "Multilayer design of core???shell nanostructure to protect and accelerate sulfur conversion reaction" Energy Storage Materials 60 (2023) 102818.





The aramid nanofibers could be upcycled from retired body armor. To demonstrate their batteries, the researchers experimented with regular-sized and miniaturized toy robots in the shape of a worm and a scorpion. The team replaced their original batteries with zinc-air cells. "Distributed energy storage, which is the biological way, is the





Lithium ion batteries and non-aqueous redox flow batteries represent two of the most important energy storage technologies to efficient electric vehicles and power grid, which are essential to decreasing U.S. dependence on fossil fuels and sustainable economic growth. I present work on composites made from Kevlar-drived aramid nanofibers





Redox flow batteries are attractive for large-scale energy storage due to a combination of high theoretical efficiencies and decoupled power and energy storage capacities. Efforts to significantly





Two-dimensional (2D) transition metal carbides and nitrides (MXenes) are a class of 2D nanomaterials that can offer excellent properties for high-performance supercapacitors. Nevertheless, irreversible restacking of MXene sheets decreases the interlayer spacing, which inhibits the ion intercalation between the MXene nanosheets and finally ???





The energy devices for generation, conversion, and storage of electricity are widely used across diverse aspects of human life and various industry. Three-dimensional (3D) printing has emerged as





???Assistant Professor, University of Arizona??? - ??????Cited by 711?????? - ???Energy storage??? - ???Batteries??? - ???Supercapacitors??? - ???Nanocomposites??? - ???Polymers??? Branched aramid nanofiber-polyaniline electrodes for structural energy storage. P Flouda, AH Quinn, AG Patel, D Loufakis, DC Lagoudas, JL Lutkenhaus.



Highly porous 3D APV separators were prepared using a two-step solvent exchange process consisting of a coordinated self-assembly process coupled with reprotonation-mediated ANF assembly, nonsolvent-induced phase separation, and swelling-assisted pore generation (Fig. 1 a) iefly, PVA and an aramid nanoseed dispersion in dimethylsulfoxide ???



Introduction. Structural energy storage devices (SESDs), or "Structural Power" systems store electrical energy while carrying mechanical loads and have the potential to reduce vehicle weight and ease future electrification across various transport modes (Asp et al., 2019). Two broad approaches have been studied: multifunctional structures and multifunctional ???